

# **Extra Tough and Versitle!**

The new Leica DISTO<sup>™</sup> E7400x is designed for demanding job site conditions and measuring tasks. Its rubber coated fiberglass reinforced housing is IP65 rated making it dust-tight and water jet protected. Plus, the E7400x is drop tested to heights of 6 feet onto hard surfaces. Thanks to the integrated tilt indirect distance and sensor. height measurements are calculated absolutely and precisely.

Leica DISTO™ E7400x - reliable measurements, even under the harshest conditions.

# Featured with:

- IP65 water jet protection and dust-tight
- 360° tilt sensor
- Smart Horizontal Mode™
- Height tracking Power Range Technology™
- Illuminated 4-line display
- Automatic multifunctional end-piece



- when it has to be **right** 



Multi-function end piece

# **Robust housing**

The measuring elements are protected by solid rubber and a fiberglass reinforced housing. Proven in drop tests from up to 6 feet high, the Leica DISTO™ E7400x is job site ready.




# Protection class IP65

The housing and keypad are specially sealed against water and dust. Cleaning under running water is also no problem.



### Leica DISTO™ E7400x Art.No. 788472

- Leica DISTOTM E7400x laser distance meter Holster
- Hand loop Batteries

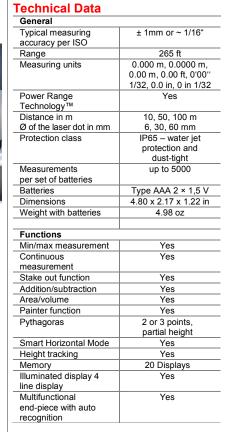

## Tilt sensor 360°

Thanks to the combination of distance and tilt measurements. you can determine vertical or horizontal distances from remote locations absolutely and precisely - even over obstructions. This is achieved using the 360 degree tilt sensor and built in short cut keys.



# Smart Horizontal Mode™

If obstructions prevent you from taking direct distance measurements, you can use the Smart Horizontal Mode<sup>™</sup> to determine the horizontal distance simply and absolutely precisely.

All illustrations, descriptions and technical specifications are subject to change without prior notice. Printed in Switzerland. Copyright Leica Geosystems AG, Heerbrugg, Switzerland, 2012

Leica Geosystems AG Heerbrugg, Switzerland www.leica-geosystems.com

Dealer Stamp



In accordance with IEC 60825-1





- when it has to be **right**